

HEAT RESISTANT SNHB LINING epigen XD005 “special novolac”

epigen
Performance Resins &
Composite Systems

TECHNICAL BULLETIN

Epigen XD-005 Special Novolac is a controlled release product developed to provide the high performance, high temperature chemical and corrosion resistance characterised by Epigen XD-005, but additionally to provide this chemical resistant protection at temperatures exceeding 200°C.

In common with most heat resistant epoxy based products, heat curing must be employed to obtain maximum properties and correct curing is most important


Extremely high cross linking density after cure provides Epigen XD-005 Special Novolac the ability to resist a range of organic solvents including ketones and chlorinated aromatics . Also highly favoured where the lining is required to address hot highly corrosive acids.

TYPICAL APPLICATIONS

Pumps & Impellers	Ducting Systems
Exhaust Stacks	Tanks & Vessels
Rail Cars	Scrubbers
Laundries	Steelwork Coating
Pipelines & Valves	Solvent Extraction

FEATURES

Highly erosion resistant polymer system
Application DFT up to 1000 micron in the one coat
Free of all solvents - zero VOC
Engineered for high mechanical strength
Resistant to organic solvents
Versatility in application - can be used with GF
HDT >200 Celsius - practical service beyond 250 Celsius
Outstanding resistance to chemicals & acids

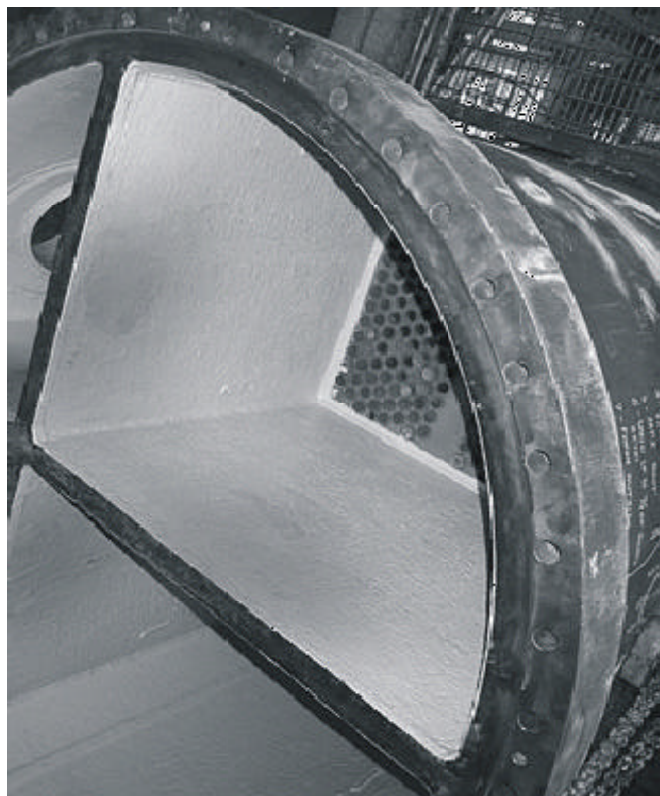

PROFILE

Ratio by weight	4 parts “A” to 1 part “B”
Pot Life minutes @ 24°C	40
Mixed consistency @ 24°C	Flowable Liquid
Specific gravity when mixed	1.5
Kg/m ² for 500 micron	0.75
Tack free time @ 24°C	180 minutes

TYPICAL CURED PROPERTIES

Compressive strength ASTM D695, Mpa	>110
Tensile strength ASTM D638, Mpa	>30
Flexural strength ASTM D790, Mpa	>50
Hardness, Shore D	89
Dielectric constant ASTM D150 (150KHz)	3.0
Maximum exposure temperature, °C	290*
Heat deflection temperature ASTM D648, °C	200

* Thermal degradation temperature. This does not necessarily represent the ultimate maximum permissible temperature.

This information is supplied as an indicative reference only. Caution should be used where direct comparisons are to be made.

HEAT RESISTANT SNHB LINING epigen XD005 "special novolac"



SURFACE PREPARATION

Methods for substrate preparation may include chemical means such as washing & etching, high pressure water blasting, or traditional abrasive blasting techniques . Caution should be maintained in selecting a technique that provides satisfactory anchor for the lining. Specialist advice is available from Peerless Industrial Systems to ensure the correct preparation procedure is employed for specific applications.

APPLICATION

Mixing of product should be carried out using slow speed mixers and completed by adding to the part "A", the part "B". Ensure the mix is homogenous and free from lumps. Avoid air entrainment. Can be applied either by airless spray, brush or roller. Since it does not contain solvents, application by spray allows the application of high film thicknesses in single coats, and ensures that all material purchased actually contributes to the final DFT. XD005 Special Novolac is of higher viscosity than conventional solvent containing coatings and application may require more specialised practices but is generally compensated for by the speed of application and need to apply fewer coats.

XD005 Special Novolac is a functional, industrial finish and is not developed to possess aesthetic properties such as high gloss which would enable it to be used where appearance is particularly important.

Note : Re-application or second coat application over cured product should only be carried out after adgrading back the existing application.

POSTCURE

To achieve full cross linking density and maximum performance, applied product should be allowed to "gel" or become "tack free" before applying heat cure. This will take several hours at at 25°C.

Heat curing can be carried out by:

- Post gel at 50°C for 6 - 8 hours using heat lamps, etc.
- Followed by post cure for 6 - 8 hours at 120°C.

Step (b) can be carried out by insitu curing. Excessive heat should be avoided during the gel stage to protect against sag and curtaining. Tests have shown that, at an air temperature of 50°C and DFT of 500 micron, this product will gel satisfactorily without sagging.

EVERY EFFORT SHOULD BE TAKEN TO PROTECT AGAINST AIR ENCAPSULATION & CARBAMATE FORMATION DURING APPLICATION. CONSULT WITH THE MANUFACTURER FOR MORE DETAILS IF UNCLEAR.

XD005SN:2009/Mar
Rev2,2011/Sept

CHEMICAL RESISTANCE

Tested at 21°C. Samples cured for 10 days at 25°C.

Curing at elevated temperatures will improve chemical resistance.

- 1 = Continuous or long term immersion
- 2 = Short term immersion
- 3 = Splash and spills
- 4 = Avoid contact

Acetic Acid, 10 %	1	Acetone	1
Acetic Acid, Glacial	1	Ammonium Chloride	1
Hydrochloric Acid, 5 %	1	Beer	1
Hydrochloric Acid, 10 %	1	Dichloromethane	1
Hydrochloric Acid, conc	1	Diesel Fuel	1
Nitric Acid, 5 %	1	Isopropyl Alcohol	1
Nitric Acid, 10 %	1	Kerosene	1
Phosphoric Acid, 5 %	1	Petrol	1
Phosphoric Acid, 20 %	1	Salt Water	1
Sulfuric Acid, 5 %	1	Sewage	1
Sulfuric Acid, 20 %	1	Skydrol	1
Ammonium Hydroxide, 5 %	1	Sodium Cyanide	1
Ammonium Hydroxide, 20 %	1	Sodium Hypochlorite	1
Potassium Hydroxide, 5 %	1	Toluene	1
Potassium Hydroxide, 20 %	1	Trichloroethane	1
Sodium Hydroxide, 5 %	1	Wine	1
Sodium Hydroxide, 20 %	1	Xylene	1

This information is supplied as an indicative reference only. Caution should be used where direct comparisons are to be made.

CURE

Variations in cure may arise due to the amount of material being applied, the thickness of material being applied, the surface temperature, and the product temperature. The cure may be increased by heating product or by leaving mixed material stand for 15 minutes before use. The cure may be decreased by cooling the product before mixing.

EPIGEN PRODUCTS

MANUFACTURED BY

Peerless Industrial Systems Pty Ltd

ABN 14 097 615 391

79 Robinson Ave, Belmont, WA 6104

PO Box 407, Cloverdale, WA 6985

Phone: (08) 9477 3788 Fax: (08) 9477 3766

Email: service@peerlessindustrialsystems.com

www.peerlessindustrialsystems.com

www.epigen.com.au